



SP40/80 DU PRO







#### **OUTSIDE UNIT**










## INSTALLATION DIAGRAM

Above












On side





# WINE SP40/80 THE NEW GENERATION OF AIR CONDITIONERS FOR WINE CELLARS

The WineMaster® product range was designed to bring optimal air conditioning solutions to the wine cellar of your dreams.

Thanks to constant temperature and humidity preservation, your wines can blossom all year long in a wine cellar under the best conditions, even in the event of extreme outside temperatures (-30°C to  $+40^{\circ}$ C).

REFERENCE	SP40 DU PRO	SP80 DU PRO
Air conditioning capacity*	Up to 40 m <sup>3</sup>	Up to 80 m³
Cooling capacity	900 watt	1600 watt
Heating capacity	500 watt	500 watt
Connectable to "WineMaster connect"	No	Yes

CONDENSATION GROUP (EXTERNAL UNIT)			
Airflow rate	840 m³/h	840 m³/h	
Sound level	42db (1m)	42db (1m)	
Weight	60 Kg	env. 74 Kg	
Dimensions H x W x D	640X853X424 mm	640 x 853 x 424 mm	
Electrical supply	230-240 V - 50Hz	230-240 V - 50Hz	
Body color	RAL 7012	RAL 7012	
Coolant	R449A	R1234 yf	
Secure pressure switch HP	•	•	
Oil separator	•	•	
Pressure actuated speed controller	•	•	
Waterproof electrical box	•	•	
Check valve	•	•	
Washable air filter	•	•	
Refrigerant line	1/4" and 3/8"	3/8" and 1/2"	
Heating belt	•	•	

EVAPORATOR (INSIDE UNIT)			
Weight	28 Kg	28 Kg	
Dimensions H x W x D	319 x 638 x 548 mm	319 x 638 x 548 mm	
Body color	RAL 7012	RAL 7012	
Number of speeds	2	2	
Diamètre de buse	125 mm	125 mm	
Grids supplied	2	2	
Dehydrator	•	•	
Thermostatic expansion valve	•	•	
Heating resistor	•	•	
Regulation	wire	wire	

<sup>\*</sup> With right insulation and adapted to the volume of the cellar.

### WINEMASTER CONNECT, Just one box and your wine cellar is connected!



Optimal wine conservation







Failure alerts

Thanks to WineMaster Connect, you can remotely adjust and ensure the correct operation of your air conditioner. Simply plug our connected box into your air conditioner to monitor or change the main operating parameters in real time.

This device works with a subscription. Ask your retailer for details of pricing.



<sup>\*\*</sup> The power could be reduced in function of outside temperature, its why the device may lose capacity to keep the cellar at 12 °C if the outside temperature gets close to 35 °C.


## A STORY OF LOVE AND TERROIR...

It is in the foothills of the Alsatian wineyards, where the wine route starts, that the WineMaster® story begins. Our attachment to terroir and our love of wine have always been the source of our thought process and creativity.

Ever since its inception in 1984, the skills and know-how of the men and women of WineMaster® have been at the heart of every step in the air conditioner making process.

Quality and detail are what motivate us, and we are proud of our products and their 100 % Alsatian design.

INNOVATION AND EXCELLENCE ARE WINEMASTER'S KEY VALUES.

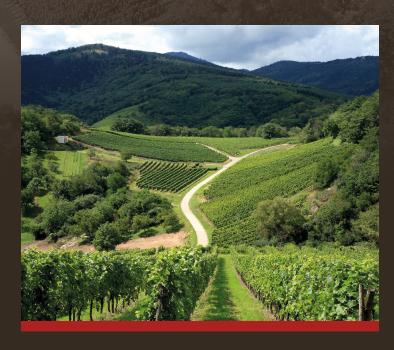

WW WIGOMEDIA Taxt and photo are not contractual - WDEPWINESP40/80DUAN 2024 - V2